

# Thermal Memory Ltd

6 Dodd Croft  
Rochdale OL16 4QX  
Gtr. Manchester  
Great Britain

Website : [www.shrinkfit.co.uk](http://www.shrinkfit.co.uk)

E-mail : [shrinkfit@gmail.com](mailto:shrinkfit@gmail.com)


Cathodic Protection  
Joining Kit

**CPJ**



**FOR PLASTIC OR  
RUBBER INSULATED  
CABLES 600/1000  
VOLT**

**WITHOUT ARMOUR**

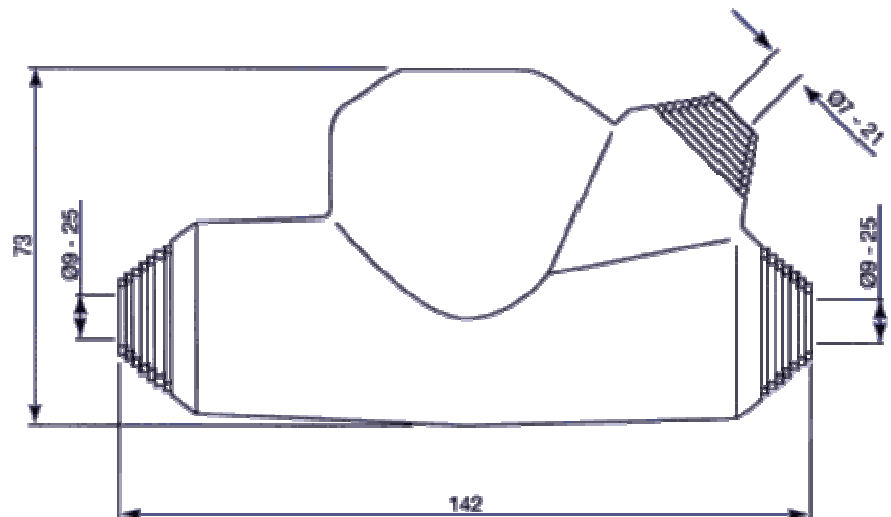

## Features

Strong clear plastic mould body with Snap-lock connection for tight seal. Stepped cable entry cut-off points for all cable diameters. Large mould shell enables crimp or split bolt/line tap connectors to be used.

Resin Shelf Life: 2-years.

## Applications

Ideal for single core Un-armoured Tee or Branch jointing rated up to 1kV, above or below ground. To suit mains cable single core max size up to 95 sq mm. Branch single core up to 35 sq mm. Used on Cathodic Protection applications including pipelines, tanks and buried structures.

## Resin Sealing Compound

High quality resin sealing compound has a high resistance to moisture absorption, is mixed in a clear pack and stored in an aluminium protective bag. The long-term electrical properties of Thermal Memory resin sealing compound result in a more reliable connection without any associated maintenance costs. Thermal Memory resin sealing compound is suitable for all climate conditions.

## Major Users

Specified by leading Oil, Gas and Water companies and Consulting engineers.

## Quality

Designed to meet the requirements of BS 7888:1998.